


ENZIS INSTALLATION INSTRUCTIONS



2" CANOPY FEED

ART. NO.

140 307bz

bronze

140 307mc

matte chrome

TECHNICAL DATA

Description: power feed with 2" J-box for power delivery.
Design: Wesley Dochnahl
Dimensions: length 3 1/2"
Material: brass, matte chrome plated



IMPORTANT SAFETY INSTRUCTIONS



1. THIS PRODUCT MUST BE INSTALLED BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED, IN ACCORDANCE WITH LOCAL NEC CODE.
2. FOR USE WITH ENZIS RAIL NETWORK ONLY.
3. The Enzis rail system is not intended for use with a power supply cord or convenience receptacle adaptor. This rail system is to be supplied by Bruck Lighting.
4. Do not install the Enzis rail system in damp or wet locations.
5. Do not install any part of a rail system less than 5 feet above the floor.
6. Do not install any fixture assembly closer than 6 inches from any curtain, or similar combustible material.
7. Disconnect electrical power before adding to or changing the configuration of the rail.
8. Do not attempt to energize anything other than lighting rail fixtures on the rail. To reduce the risk of fire and electric shock, do not attempt to connect power tools, extension cords, appliances, and the like to the rail.
9. This track system MUST BE HARD WIRED. For all the wire connections, use Listed Wire Nuts.
10. Do not connect a rail to more than one circuit unless the rail is constructed so that it can be used with more than one circuit. Check with a qualified electrician. Although the rail lighting system may seem to operate acceptably, a dangerous overload of the neutral may occur and result in a risk of fire.
11. Secondary connections must be clean and tight to avoid arcing and overheating!
12. Power Feed must be 3 inches away from any support and 6 inches away from fixture.
13. Warranty is void in case of unauthorized modifications and/or improper use.


**SAVE THESE INSTRUCTIONS AND REFER
TO THEM WHEN ADDITIONS TO OR
CHANGES IN THE TRACK
CONFIGURATION ARE MADE**

CONTENTS OF DELIVERY

canopy power feed with 2" J-box, mounting screws, allen wrench and crimps

NOTE

The 2" canopy feed is designed for a ceiling thickness between 1-1/16" and 3/16".

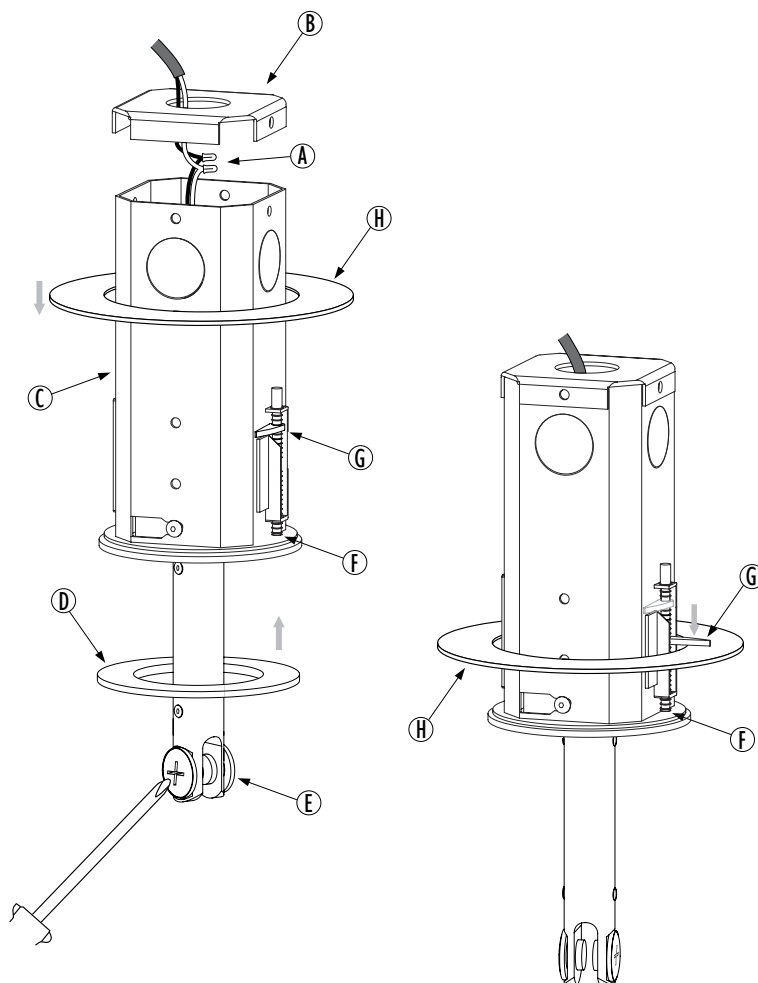

USER MANUAL

INSTALLING 2" CANOPY FEED

- Drill a 2-1/4" hole in the mounting surface.
- Slide the j-box (C) into the mounting surface (make sure the side brackets (G) are not extended outwards). When possible, place support ring (H) over J-box. Tighten the mounting screws (F) to extend the side brackets and hold the j-box in place. DO NOT overtighten the screws; the side brackets may cut through the mounting surface.
- Pull the 10 w voltage wires (A) through the back plate (B). Use wire nuts to connect the wires. Attach the back plate (B) to the j-box (D) with screws.
- Place the magnetic cover-plate (D) over the j-box (C) to complete the installation.
- Run the Enzis track through the power feed and secure by tighten thumb screws (E) with phillips head screwdriver, #3 is the recommended size to use.